



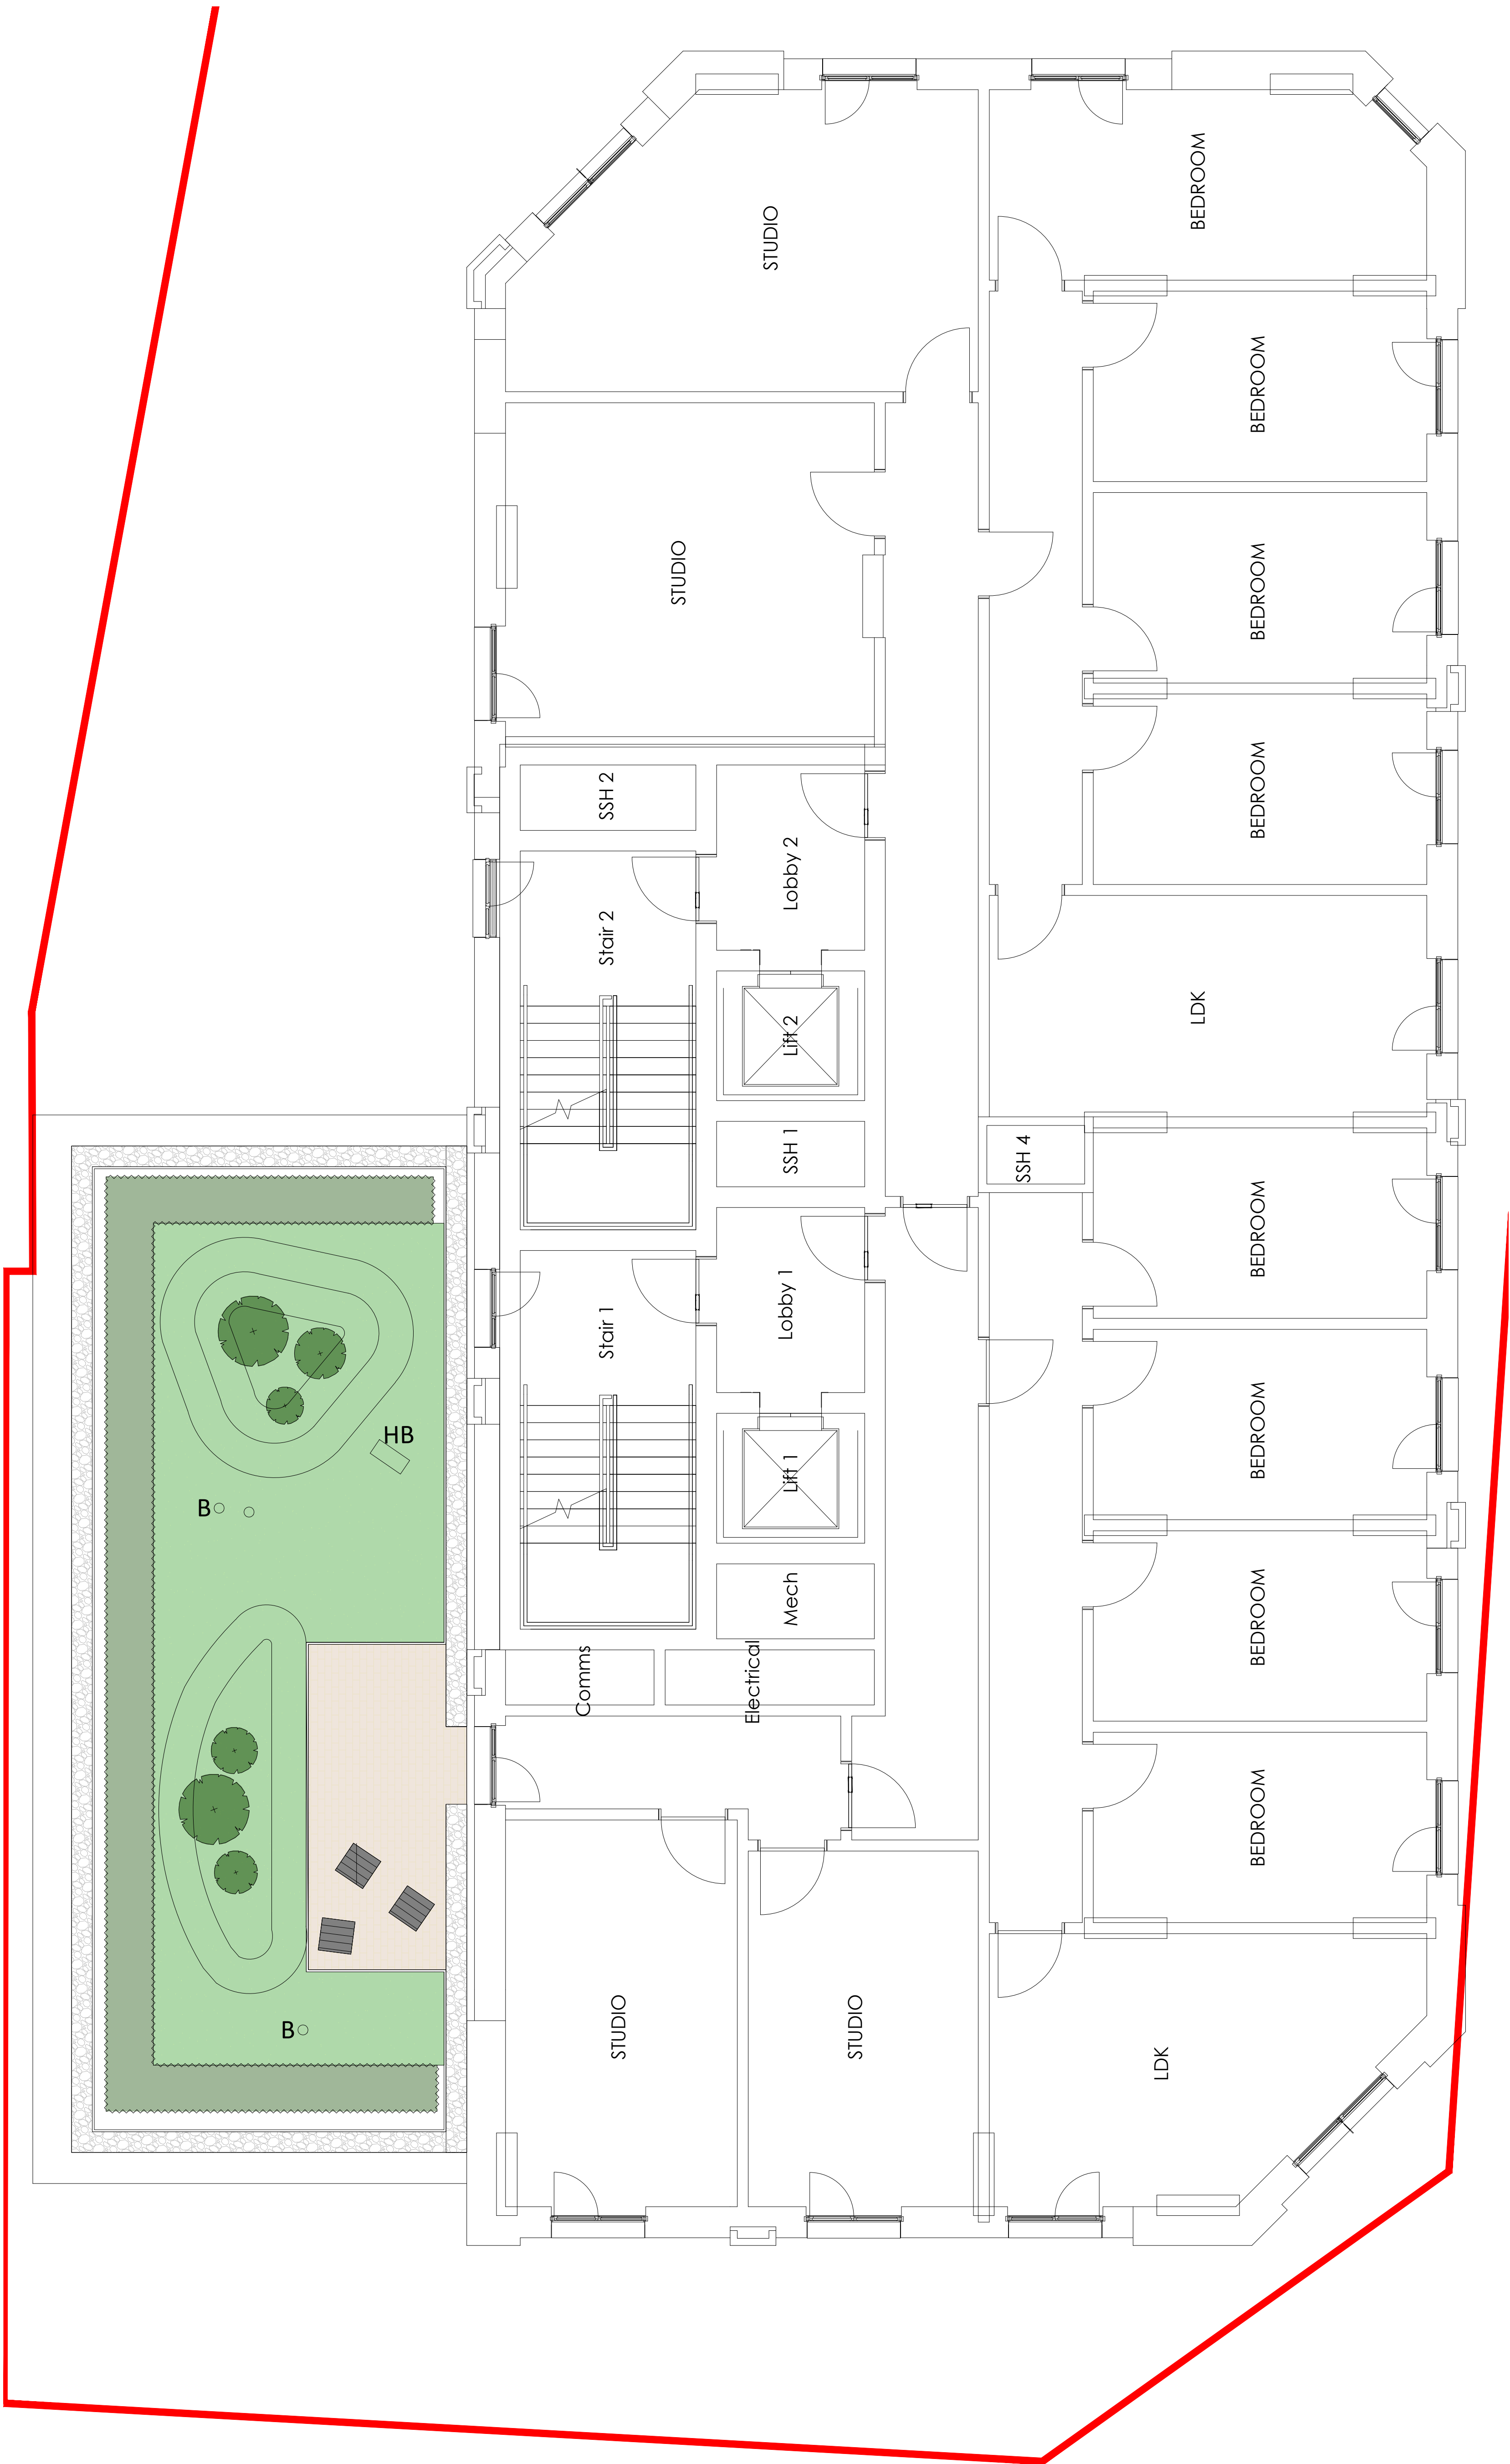

- Notes
1. All dimensions in mm, unless otherwise stated.
 2. Scaling from drawing if printed incorrectly may lead to errors.
 3. All information outside red line boundary shown for contextual purpose only.
 4. All hatch patterns are indicative only unless stated otherwise.
 5. This drawing is to be read in conjunction with the following R.B.L.A landscape architecture documentation: RBL-XX-00-DR-L-0001-General Arrangement Plan-Ground Floor & all relevant documentation from the design team
 6. Levels information on this drawing illustrates the design intent. The contractor is to check and verify all levels and dimensions against site survey information.
 7. Any discrepancies in the design information are to be brought to the attention of R.B.L.A landscape architecture, in writing, prior to commencement of construction works.
 8. All proprietary products shall be installed in strict accordance with manufacturers written instructions.
 9. Refer to other consultants' drawings and specifications for the following design information:
 - Foundation details
 - Base course and/or sub bases design & specification
 - Waterproofing of any element
 - Levels & Drainage design and infrastructure
 - Lighting and ducting
 - Existing & proposed utilities
 10. Plant quantities are to suit site areas in accordance with scheduled plant densities.
 11. Any proposed plant substitution shall be agreed with the landscape architect prior to ordering.


Key



Planning application boundary




Paving type 1
400x300x30mm porcelain pavers
Colour: Neutral
Stretcherbond




Gravel margin
granite aggregate chippings
aggregate size 6-9mm




Wildflower meadow
PT09 Botanical Skyline grass seed mix
to be seeded in 150mm depth low fertility top soil
in accordance with 'BS3882:2015 Specification for topsoil and requirements for use'



Timber seating cubest
Timber top seats with powder coated steel supports
ground fixed



Proposed specimen shrubs
80-100cm individual shrubs
refer to planting plan for species specification



Proposed hedgerow
double staggered row
mixed species instant hedge mix
1.2m height. refer to planting plan for species specification




Proposed mounding- max height 900mm



Proposed metal upstand
300mm height
powder coated steel




Proposed Habitat Hotel



Proposed Bee Pillar

Scale



05.08.26 Information Issue
Date Description of revision

P01
Revision

R.B.L.A

www.rblandscape.co.uk
rosebarton@rblandscape.uk

Project
TY CAMBRIA
RB26-0009

Client
RHOMCO CONSULTING

Document title
LANDSCAPE GENERAL ARRANGEMENT
- 15th FLOOR

Paper size
A1

Status
FOR INFORMATION

Drawing number
0009-RBL-XX-00-DR-L-0004

Scale
1:50

S2

Revision
P01